




UL FIRE RATED

PAGE 1 OF 1

## Design No. U906

**Bearing Wall Rating - 2 HR.**

**Nonbearing Wall Rating - 2 HR.**

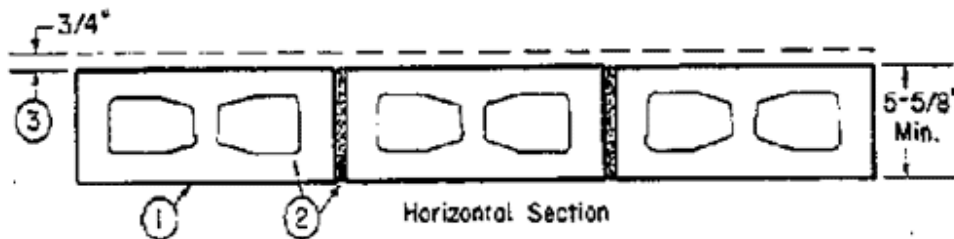

**1. Concrete Blocks\*** - Nominal 6 by 8 by 16 in., hollow or solid.

Classification D-2 (2 hr).

Anchor Concrete Products, Inc.

Florida Rock Industries, Inc.

Pike Industries Inc., d/b/a Tilcon Whitcomb.

Westbrook Concrete Block Co., Inc.

**2. Mortar** - Blocks laid in full bed of mortar, nom. 3/8 in. thick, of not less than 2-1/4 and not more than 3-1/2 parts of clean sharp sand to 1 part Portland cement (proportioned by volume) and not more than 50 percent hydrated lime (by cement volume). Vertical joints staggered.

**3. Portland Cement Stucco or Gypsum Plaster** - If used, add 1/2 hr. to Classification. Attached to concrete blocks (Item 1)

**4. Foamed Plastic\*** - (Optional - not shown) 1-1/2 in thick max, 4 ft wide sheathing attached to concrete blocks (Item 1).

**Celotex Corp.** - Type Thermax

\*Bearing the UL Classification Marking